



PINK PE GUSSETED SHROUDS

20-019-60xx

Pink polyethylene antistatic shrouds

Film construction

LD/HD/LD polyethylene

Standard compliance

IEC 61340-5-1

Directive 94/62/EC


2011/65/EU (ROHS directive)

Material and features

Material:	Pink Polyethylene with antistatic agent Amine free
Thickness:	$\leq 80\mu$ (+/- 10%)
Surface resistance:	$< 10^{11}$ Ohm
MVTR:	≤ 2.4 g/m ² /24 h
Shelf life:	3 years

Dimensions and Part Number

Part number	Dimensions (WxGxH)	Thickness	MVTR
20-019-6025	1250 x (2x425) x 1850 mm	80 μ (+/- 10%)	≤ 2.4 g/m ² /24 h
20-019-6027	1250 x (2x425) x 1600 mm	80 μ (+/- 10%)	≤ 2.4 g/m ² /24 h
20-019-6029	579 x (2x196) x 745 mm	80 μ (+/- 10%)	≤ 2.4 g/m ² /24 h
20-019-6089	410 x (2x155) x 600 mm	50 μ (+/- 10%)	≤ 1.5 g/m ² /24 h

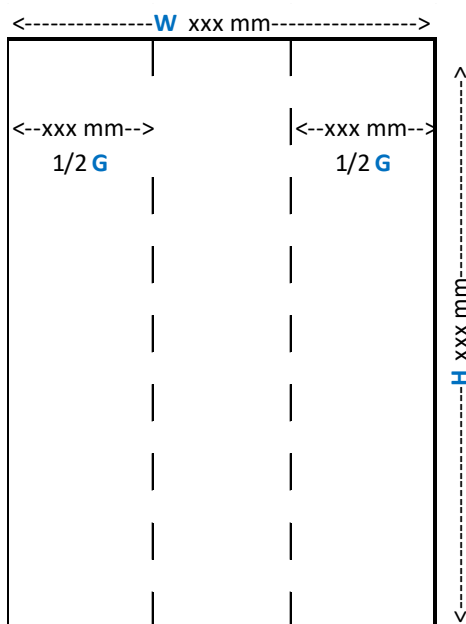

Options

- Other models on stock or on request
- Single layer LDPE gusseted shrouds also available (20-029-xxxx)