

AIR CUSHION MACHINE AIRWAVE 2

70-400-0009

Fast air cushion production.

Uncompromising on efficiency, speed and quality, the AirWave2 is a flexible and user-friendly premium model. This combined system produces air cushions or pads in seconds. The AirWave2 is small and lightweight so fits into any packing area. Air cushion systems are tested in a 3-shift operation and offer complete flexibility in use.

The air cushion film comes on rolls, which make the air cushion machines particularly cost-effective and flexible in use.



SPECIFICATIONS

PARAMETER	VALUE
Machine dimensions:	
Length x width	413 x 316 mm
Height	232 mm
Weight	6.5 kg
Power requirements	115-240 V 50-60 Hz 200 W
Conformity	EC declaration of conformity according to EC Machinery Directive 2006/42/EC, Annex 111.A
Air connections	None - internal fan
Production speed	Up to 20 m/min
Volume	max. 76 dB
Colour	Grey / blue (standard) Individually from 10 machines
Optional	+ Automatic stock detection through filling level sensor + Operation with foot pedal + Bluetooth control + Jumbo roll holder + Can be fully integrated (mobile storage, overhead units, etc.)

USAGE:

The interactive touch screen display always shows all the important information, temperature index, air volume, inflation time and length. The complete functionality can be depicted using a few logical pushbuttons. Five programs can be stored and selected using a shortcut. The control panel can be locked to prevent unwanted changes.

FILM TYPES:

Film type	Eurostat PN	Thickness	Cushion size WidthxHeightxLength	Number of pce/box	Number of box/pallet
Type 7.1	20-022-9076	20	210mmx100mmx700m	2 rolls	120
Type 8.3	20-022-9077	20	420mmx320mmx450m	1 roll	72
Type 8.4	20-022-9078	20	420mmx300mmx450m	1 roll	72


Subject to change without notice. The customer must validate that the products can be used dependent on the local conditions. The information given in the product information should not be regarded as a guarantee or as assured features, but only makes recommendations based on many years of experience and testing. Dimensional and quantity tolerances according to GKV 2007.

• 20-022-9076


AirWave type 7.1 ESD antistatic wrapper with a low surface resistance of $<1 \times 10^9$ Ohm.

Color: pink.

Suitable as intermediate wrapper, crosswise wrapping and wrapper.

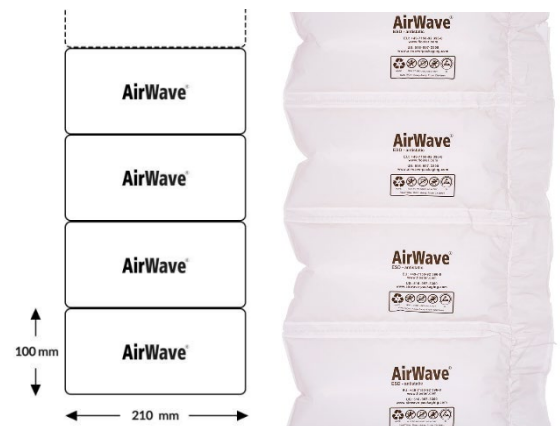

• 20-022-9077

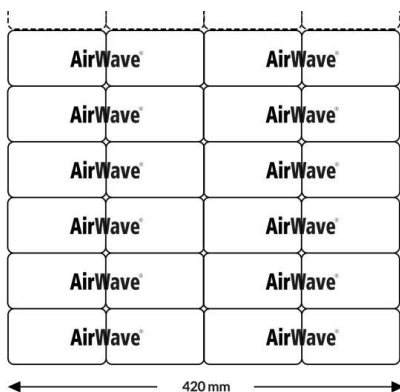

AirWave type 8.3 ESD antistatic wrapper with a low surface resistance of $<1 \times 10^9$ Ohm.

Color: pink.

Suitable as intermediate wrapper, crosswise wrapping and wrapper.


-EUROSTAT-

- 20-022-9078

AirWave type 8.4 ESD antistatic wrapper with a low surface resistance of $<1 \times 10^9$ Ohm.

Color: pink.

Suitable for sensitive products and wrapper.

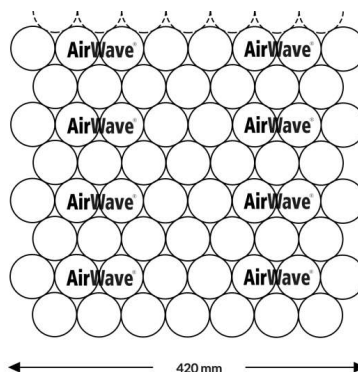

ON REQUEST

Recycled material and other bubble types, with MOQ.